

3375 3 Point Hitch Backhoe

FEATURES & BENEFITS


OVER 35 YEARS of PRODUCTIVITY, RELIABILITY and DURABILITY

- Dual-cylinder swing with internal cushioning provides maximum power where it is needed, decreases stress and increases reliability.
- Swing speed control is standard. Allows the operator to adjust swing speed.
- Circuit relief valve protected while allowing smooth operation. SAE float detent in boom circuit.
- Inline pressure filter and reverse flow check valve insures longer valve life and less maintenance.
- Replaceable bushings in all major pivot points decreases maintenance cost.
- 1³/₈" stress proof pins in boom dipper and bucket and 1¹/₄" stress proof pins in stabilizers and swing provide higher strength with more wear surface.
- Large diameter cylinders create more force with less pressure for longer life and increased production.
- High-capacity buckets provide more volume per bucketful.
- Large cross-section boom and dipper increases strength to weight ratio and decreases fatigue.
- High clearance swingpost improves angle of approach for loading on trailer.
- Large comfortable operator compartment allows for easy on and off and less fatigue.
- BRADCO Backhoes are covered by a two year limited warranty.



Specifications and design are subject to change without notice and without liability therefore. Whenever applicable specifications are in accordance with SAE standards.

Get Attached®

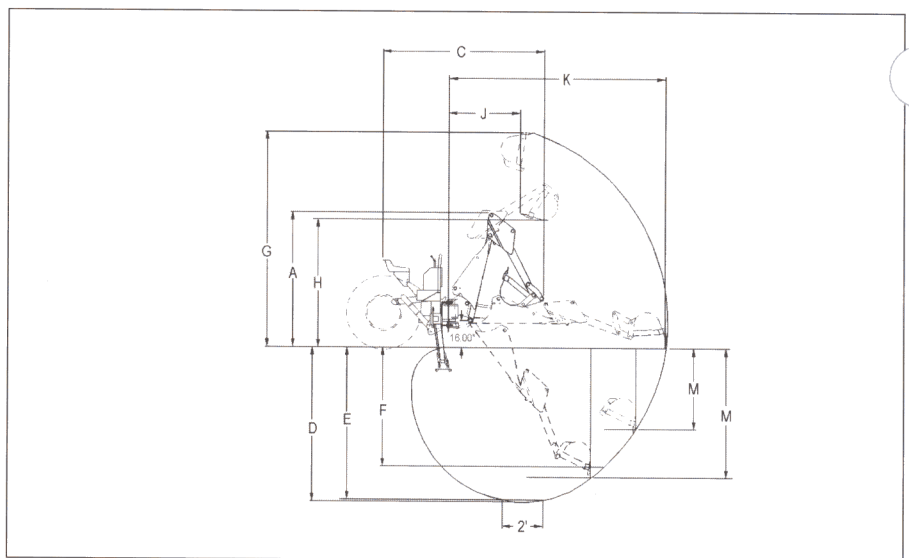

SPECIFICATIONS*

TRANSPORT

A	Transport Height (with boom fully retracted)	6'6"
	Transport Width (with stabilizers up)	4'8"
B	Ground Clearance	12"
C	Overall Length	7'7"

	Boom Pivot Height	16"
	Operating Weight w/12" Bucket	1030#

OPERATIONAL

D	Digging Depth Maximum	7'7"
E	Digging Depth (2 Ft.) Flat Bottom	7'6"
F	Digging Depth (8 Ft.) Flat Bottom	5'10"
G	Overall Operating Height—Fully Raised	10'5"
H	Loading Height	6'3"
J	Loading Reach	3'6"
K	Reach From Swing Post	10'8"
M	Straight Wall Digging Depth	4'0"
	Straight Wall Digging Depth Bell Hole Link	6'4"

	Stabilizer Spread Operating Position	8'0"
	Stabilizer Down Below Grade	13"
	System Relief Valve Setting	2100 PSI
	Digging Force—Bucket Cylinder	2700#
	Digging Force—Dipper Cylinder	1850#
	Bucket Rotation	180°
	Swing Arc	180°

***All Specifications with boom pivot 16" above ground.**

BUCKETS AND CAPACITIES

Bucket Size	Struck Cap. Ft. ³	Heaped Cap. Ft. ³	Weight Lbs.	Number Of Teeth
10"	.78	.92	72	3
12"	1.00	1.20	76	3
16"	1.51	1.86	89	4
18"	1.71	2.14	95	4
24"	2.33	3.10	115	4



BRADCO®

Attachment Technologies, Inc.
 BRADCO®/McMILLEN™
 P.O. Box 266 • Delhi, Iowa 52223 USA
 563 922 2981 • 800 922 2981
 Fax 563 922 2700 • www.get-attached.com