

# 609 Backhoe



Attachment  
Technologies  
Incorporated®

# BRADCO®

Get Attached®

**BRADCO® POWER BACKHOES**  
for Skid-Steer Loaders  
and Commercial Tractors



# 609 Backhoe

## FEATURES & BENEFITS


**OVER 35 YEARS of PRODUCTIVITY, RELIABILITY and DURABILITY.**

- Best bucket digging force for a four-bar linkage backhoe in its class.
- Longest reach from the swing post of any backhoe in its class provides the ability to place material further from the excavation and allows for fewer moves.
- Highest-capacity buckets in its class provide more volume per bucketful.
- Dual-cylinder swing provides maximum power where it is needed.
- Swing speed control standard.
- Cushioned swing brings the backhoe to a gentle stop at each end of the swing arc.
- High clearance swingpost allows operation where clearance is critical.
- Optimum performance with 9-12 gpm hydraulic systems.
- BRADCO® Backhoes are covered by a two year limited warranty.



*Specifications and design are subject to change without notice and without liability transfers. Whenever applicable specifications are in accordance with SAE standards.*

**Get Attached®**

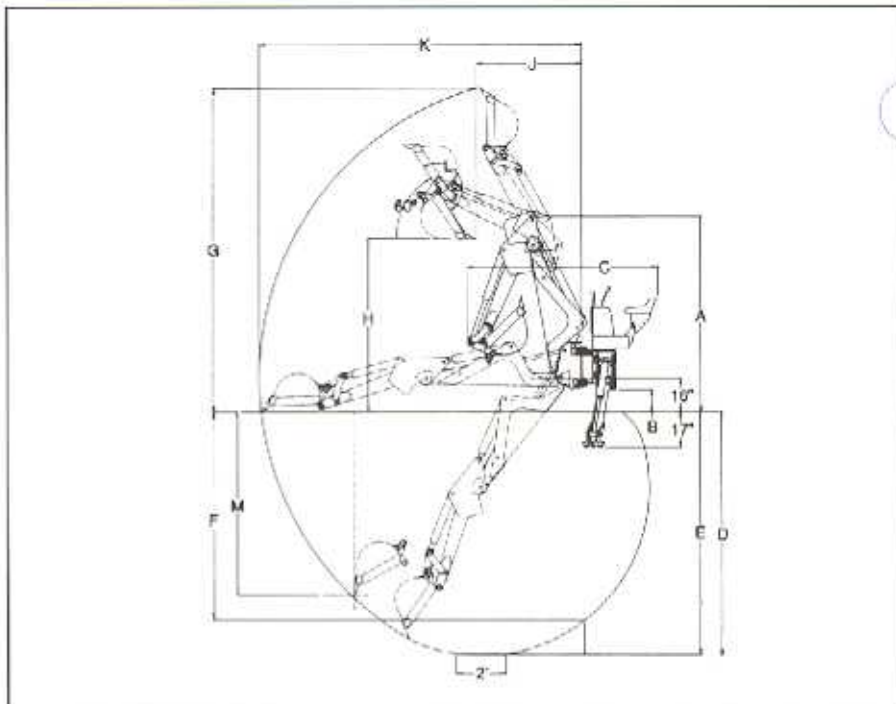

### SPECIFICATIONS

#### TRANSPORT

A	Transport Height (with boom fully retracted)	7'9"
	Transport Width (with stabilizers up)	4'9"
B	Ground Clearance	11"
C	Overall Length	7'7"
	Boom Pivot Height	16"
	Operating Weight w/12" Bucket	1702#

#### OPERATIONAL

D	Digging Depth Maximum	9'8"
E	Digging Depth (2 Ft.) Flat Bottom	9'7"
F	Digging Depth (8 Ft.) Flat Bottom	8'3"
G	Overall Operating Height - Fully Raised	12'10"
H	Loading Height	6'10"
J	Loading Reach	4'2"
K	Reach From Swing Post	12'10"
L	Bucket Rotation	180°
	Swing Arc	180°
M	Straight Wall Digging Depth	7'3"
	Stabilizer Spread Operating Position	9'11"
	Stabilizer Down Below Grade	17"
	System Relief Valve Setting	2500 PSI
	Digging Force - Bucket Cylinder	5908#
	Digging Force - Dipper Cylinder	3232#

#### BUCKETS AND CAPACITIES

Bucket Size	Struck Cap. Ft. <sup>3</sup>	Heaped Cap. Ft. <sup>3</sup>	Weight Lbs.	Number Of Teeth
12"	1.43	1.83	125	3
16"	1.98	2.56	139	4
18"	2.25	2.98	147	4
20"	2.52	3.40	153	4
24"	3.07	4.32	170	4
36"	4.48	6.14	242	7



# BRADCO

Attachment Technologies, Inc.  
BRADCO/McMILLEN™  
P.O. Box 266 • Delhi, Iowa 52223 USA  
563 922 2981 • 800 922 2981  
Fax 563 922 2700 • [www.get-attached.com](http://www.get-attached.com)