

611 Backhoe

ATI

Attachment
Technologies
Incorporated™

BRADCO®

Get Attached®

BRADCO® POWER BACKHOES
for Skid-Steer Loaders
and Commercial Tractors



611 Backhoe

FEATURES & BENEFITS


OVER 35 YEARS of PRODUCTIVITY, RELIABILITY and DURABILITY.

- Best bucket digging force for a four-bar linkage backhoe in its class.
- Longest reach from the swing post of any backhoe in its class provides the ability to place material further from the excavation and allows for fewer moves.
- Highest-capacity buckets in its class provide more volume per bucketful.
- Dual-cylinder swing provides maximum power where it is needed.
- Swing speed control standard.
- Cushioned swing brings the backhoe to a gentle stop at each end of the swing arc.
- High clearance swingpost allows operation where clearance is critical.
- Optimum performance with 9-12 gpm hydraulic systems.
- BRADCO® Backhoes are covered by a two year limited warranty.



Specifications and design are subject to change without notice and without liability therefore. Whenever applicable specifications are in accordance with SAE standards.

Get Attached®

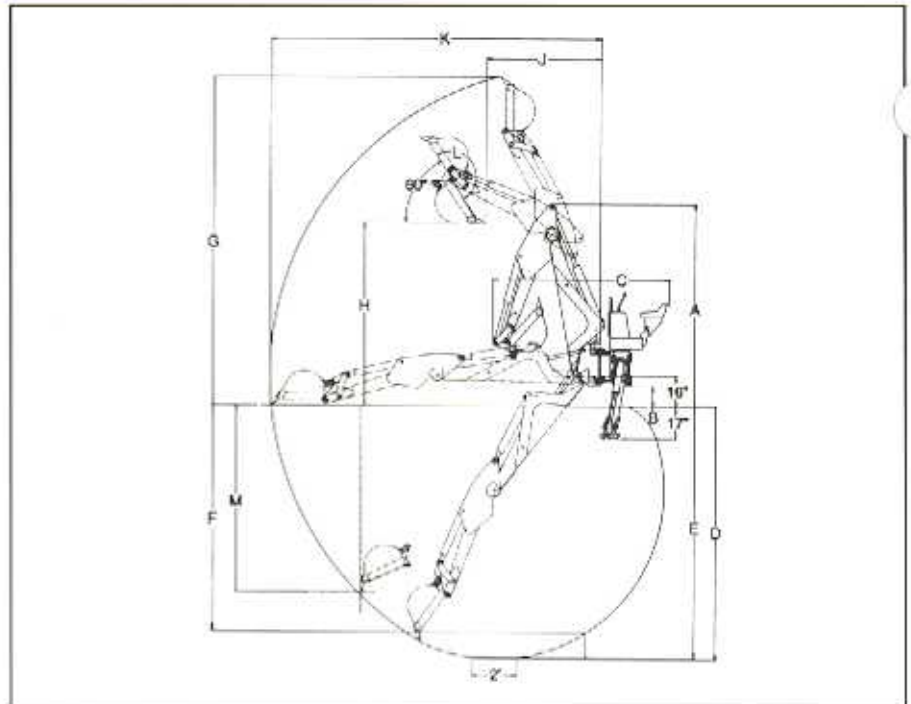

SPECIFICATIONS

TRANSPORT

A	Transport Height (with boom fully retracted)	8' 10"
	Transport Width (with stabilizers up)	4' 9"
B	Ground Clearance	11"
C	Overall Length	7' 9"
	Boom Pivot Height	16"
	Operating Weight w/12" Bucket	1847#

OPERATIONAL

D	Digging Depth Maximum	11' 1"
E	Digging Depth (2 Ft.) Flat Bottom	11' 0"
F	Digging Depth (8 Ft.) Flat Bottom	9' 11"
G	Overall Operating Height - Fully Raised	14' 5"
H	Loading Height	8' 0"
J	Loading Reach	5' 0"
K	Reach From Swing Post	14' 5"
L	Bucket Rotation	180°
	Swing Arc	180°
M	Straight Wall Digging Depth	8' 2"
	Stabilizer Spread Operating Position	9' 11"
	Stabilizer Down Below Grade	17"
	System Relief Valve Setting	2500 PSI
	Digging Force - Bucket Cylinder	6187#
	Digging Force - Dipper Cylinder	4160#

BUCKETS AND CAPACITIES

Bucket Size	Struck Cap. Ft. ³	Heaped Cap. Ft. ³	Weight Lbs.	Number Of Teeth
12"	1.43	1.83	125	3
16"	1.98	2.56	139	4
18"	2.25	2.98	147	4
20"	2.52	3.40	153	4
24"	3.07	4.32	170	4
36"	4.48	6.14	242	7



BRADCO

Attachment Technologies, Inc.
BRADCO®/McMILLEN™
 P.O. Box 266 • Delhi, Iowa 52223 USA
 563 922 2981 • 800 922 2981
 Fax 563 922 2700 • www.get-attached.com